


EYM 型

EYM TYPE

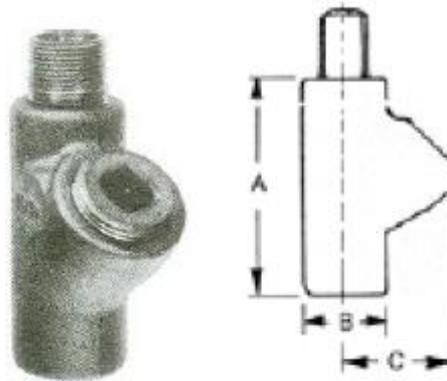


1/2"~1"

規格 Size (IN)	可鍛鑄鐵 Malleable Iron	表面處理 Standard Finishes	鋁合金 Aluminum Alloy	材料 Material Std. Ma
	型號 Cat. No.		型號 Cat. No.	
1/2	EYM 16	電鍍鋅 Zinc Electroplate 熱浸鋅 H.D. Galvanize 達克鏽 Dacrotizing	EYM16-A	E 6 Sa
3/4	EYM 22		EYM22-A	
1	EYM 28		EYM28-A	
1 1/4	EYM 36		EYM36-A	
1 1/2	EYM 42		EYM42-A	
2	EYM 54		EYM54-A	
2 1/2	EYM 70		EYM70-A	
3	EYM 82		EYM82-A	
4	EYM104		EYM104-A	

OSAJ
箱(盒)接頭 / 放大接頭

With washer & Locknut
 W/o washer & Locknut



Application
: Adaptor

- Provides a means of thread conversion

Design Specification	BS 6121, IEC 62444, EN 50262
Compliance Standard	IEC/EN 60079-0, 1, 7, 31
ATEX Certification	Presafe 16 ATEX 7985X
IECEx Certification	IECEx PNE 15.0019X
TR CU Certification	RU-C-KRAA87B.00251/19
PESO Certification	PA65223
CCC Certification	2020332313000816
Code of Protection	II2G Ex db IIC Gb, Ex eb IIC Gb, II2D Ex tb IIC Db
Operating Temperature	-60 °C ~ 110 °C
Regulation	Zone 1, 2 & 21, 22, Gas Group IIA, IIB, IIC, Dust Group IIA, IIB, IIC
Ingress Protection	IP 66 / 67 IP65 available when requested only
Gland Material	Nickel plated brass (standard), Brass (Only), Stainless steel (316L)
Gasket (washer)	Nylon (Standard), PTFE-Teflon (Option)
Accessories (optional)	Lock nut, Sealing washer

The standard applied to KCS is Korean industrial standard created by translating IEC international standards without changing the technical content and standard format.